



## Hitouch 5N

HN18N-72HT

# 570-595W

### BIFACIAL

High Efficiency Module

### 23.0%

Maximum Efficiency



### Long-Term Reliability

Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal).

Excellent anti-PID performance to guarantee a better sustainability in harsh environment.



### Lower Hot Spot and Crack Risk

Reduce hot-spot risk with optimized electrical design and lower operating current.

Reduce crack risk by MBB solar cell design.



### Higher Power Output

Higher module conversion efficiency benefit from bigger wafer and half-cell structure.


MBB technology enhances current collection with lower series resistance.



### Excellent Temperature Coefficient

Lower operating temperature and temperature coefficient increases the power output.

## Power Warranty

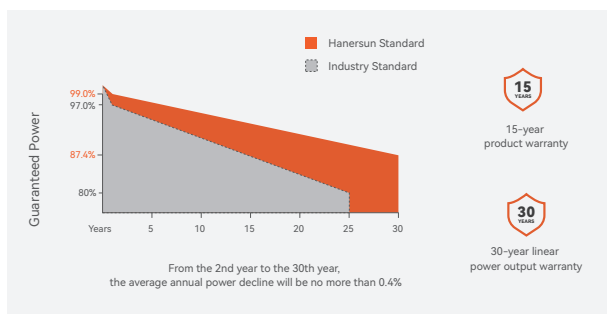

## Certificates



## Insurance



## About Hanersun

Hanersun is a world-leading clean energy company, with a business scope from the R&D and intelligent manufacturing of solar modules, energy storage products, to comprehensive energy solutions.

## Electrical Characteristics (STC)

Module Type	HN18N-72HT570W	HN18N-72HT575W	HN18N-72HT580W	HN18N-72HT585W	HN18N-72HT590W	HN18N-72HT595W
Maximum Power (Pmax)	570	575	580	585	590	595
Maximum Power Voltage (Vmp)	42.80	43.00	43.20	43.40	43.60	43.80
Maximum Power Current (Imp)	13.32	13.38	13.43	13.48	13.54	13.59
Open-circuit Voltage (Voc)	51.00	51.20	51.40	51.60	51.80	52.00
Short-circuit Current (Isc)	14.11	14.17	14.23	14.29	14.35	14.41
Module Efficiency(%)	22.1%	22.3%	22.5%	22.6%	22.8%	23.0%

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5.

Power Tolerance: 0~+3%

## Electrical Characteristics (BNPI)

Module Type	570W	575W	580W	585W	590W	595W
Maximum Power (Pmax)	632	637	643	648	654	659
Maximum Power Voltage (Vmp)	42.80	43.00	43.20	43.40	43.60	43.80
Maximum Power Current (Imp)	14.77	14.82	14.89	14.94	15.00	15.05
Open-circuit Voltage (Voc)	51.00	51.20	51.40	51.60	51.80	52.00
Short-circuit Current (Isc)	15.63	15.70	15.77	15.83	15.90	15.97

BNPI: Irradiance: Front 1000W/m<sup>2</sup>, Rear 135W/m<sup>2</sup>, Cell Temperature 25°C, AM=1.5

## Mechanical Parameters

Solar Cells	N-TYPE Monocrystalline(182mm)	No. of Cells	144 [2 x (12 x 6) ]
Module Dimensions	2278*1134*30mm	Weight	32.5kg
Glass	2mm-2mm	J-Box	IP68
Frame	Anodized Aluminium Alloy	Connector	MC4-EVO 2A/Z4S-abcd/Others
Output Cable	4.0mm <sup>2</sup>	Cable Length	300/300mm (can be customized)

## Operating Parameters

Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500V DC (IEC)
Maximum Series Fuse Rating	30A
Bifaciality	80±5%
Fire Class Rating	Class C

## Temperature Ratings

Temperature Coefficient of Pmax	-0.28%/°C
Temperature Coefficient of Voc	-0.23%/°C
Temperature Coefficient of Isc	+0.045%/°C


(Do not connect Fuse in Combiner Box with two or more strings in parallel connection)

## Packaging


Pcs per Pallet: 37

Pcs per 40' HC: 740


## I-V Curves of PV Module (580W)

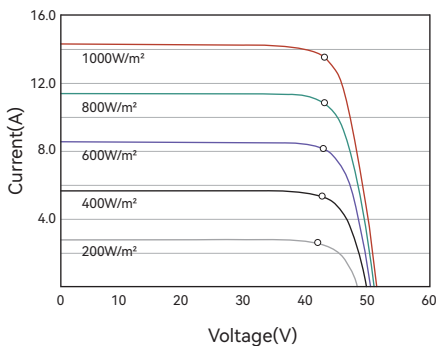


## P-V Curves of PV Module (580W)

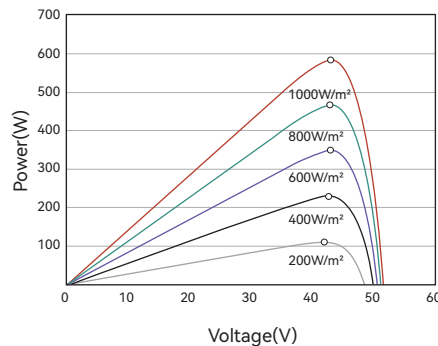

## Dimensions (Unit: mm)

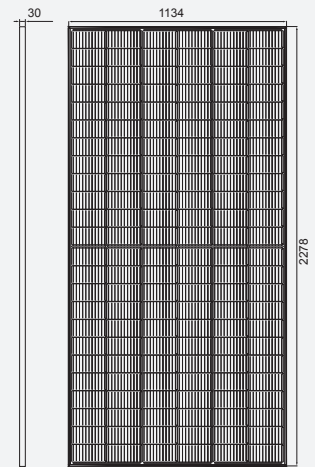

Front View

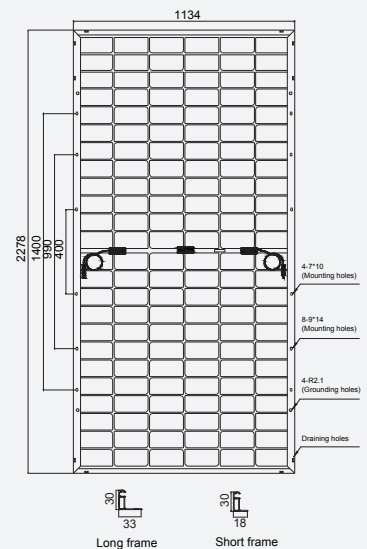

Back View